

## LFTP Series IP65 Outdoor Wall-mount Fiber Enclosure

### Features



- High quality cold roll steel 1.5mm or BS316 Stainless steel 1.5mm
- Two compartments in one box with dual doors, spacious design for splicing, fiber storage and patching
- Waterproof design to meet the requirements of indoor and outdoor harsh environment
- Fiber cable lead in and fixing unit meets the need of multiple cable fixed
- A unique drop cable fixing device and multiple layer fixed, each drop cable is fixed separately, convenient for the expansion and maintenance
- Wall mounted installation with anti-invading design, easy & fast installation and reliable
- Ingress Protection: IP65
- 1.2mm thickness of mild steel with the electrostatic spray layer
- Routing spools for guiding the excess cable
- Comply with TIA / EIA 568B, Bellcore GR-326, IEC6 0 8 7 4-10, Telcordia, JIS compliance

### Specifications



Parameter	LFTP1(24 Port)	LFTP2(48 Port)	LFTP3(72 Port)	LFTP4(96 Port)
No. of Adapter Plates	4	8	12	16
No. of Splice Tray (Max.)	2	4	6	8
No. of Ports (Max.)	≤24	≤48	≤72	≤96
	(≤48 LC Type)	≤(96 LC type)	≤(144 LC type)	≤(192 LC type)
Material	Cold roll steel 1.5mm or BS316 Stainless steel 1.5mm			
Color	Beige	Beige	Beige	Beige
Dimension (Height)	380mm	380mm	570mm	730mm
(width)	420mm	420mm	450mm	450mm
(Depth)	110mm	140mm	145mm	145mm

### Product Gallery


48 Ports

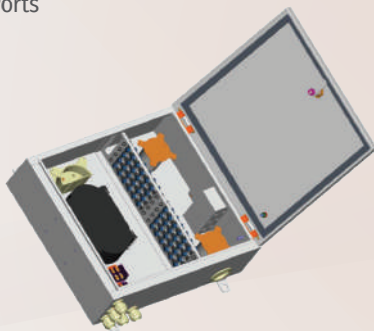

72 Ports

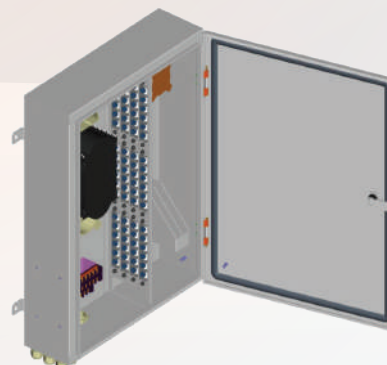

# Ordering Information

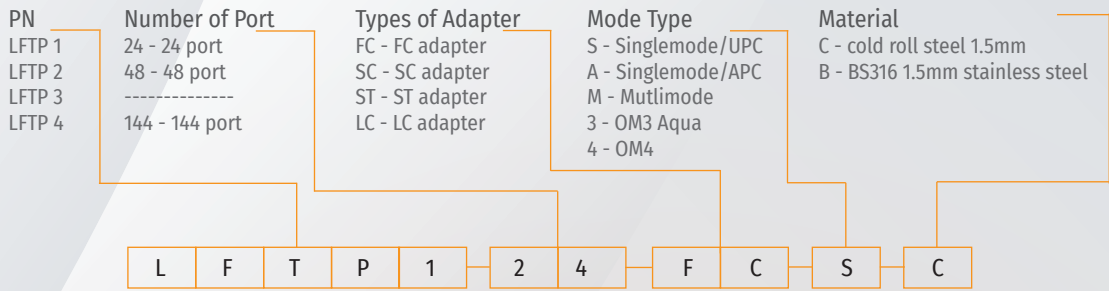

\*Ordering code example