

LGR Series Wall-mount Fiber Enclosure



24 Ports

Features


- Two compartments in one box with dual doors, spacious design for splicing, fiber storage and patching
- Compact, Light weight, Ruggedized and Durable Construction
- Modular Splice Tray, 6 adaptors per panel for FC/SC/ST/LC adaptors
- Maximum 24 ports for SC/ST/FC and 48 ports for LC
- Rubber grommets sealed for cable entry holes, two are specially designed for outdoor cable entry
- Routing spools for guiding the excess cable
- Convenient access for installation, maintenance and termination
- Comply with TIA / EIA 568B, Bellcore GR-326, IEC60874-10, Telcordia, JIS compliance

Specifications

	LGR 1	LGR 2
Parameter	24 Ports	48 Ports
No. of Cable Entry Ports	8	8
No. of Adaptor Plates (Max.)	4	8
No. of Ports (Max.)	≤ 24	≤ 48
	≤ (48 LC Type)	≤ (96 LC Type)
No. of Splice Tray (Max.)	4	8
Material	Cold-roll steel sheets	Cold-roll steel sheets
Color	Beige	Beige
Dimension (Height)	455mm	455mm
(width)	405mm	405mm
(Depth)	80mm	120mm
Weight (Net)	5.5kg	7kg

Adaptor Plate


FC Simplex Type




SC Simplex Type




ST Simplex Type



LC Duplex Type



Ordering Information

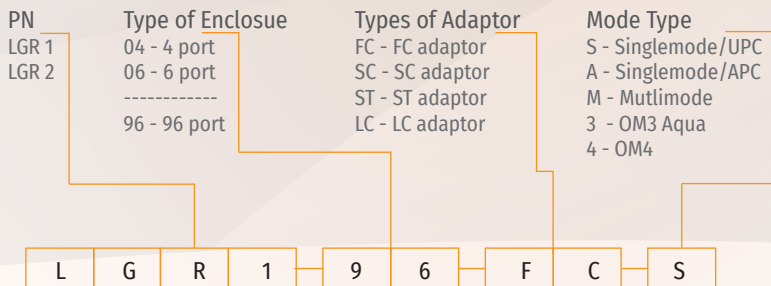

*ordering information example