

LGP65 SERIES WATERPROOF WALL-MOUNT FIBER ENCLOSURE



Features

- Two deckers in one box with single doors, lower decker for splicing while the upper flip out type decker for patching
- Very Compact, Light weight, Ruggedized and durable construction
- Modular Splice Tray, 6 adaptors per panel for FC/SC/ST/LC adaptors
- Maximum 24 ports for SC/ST/FC and 48 ports for LC
- Convenient access for installation, maintenance and termination
- Waterproof design to meet the requirements of indoor and outdoor harsh environment
- Ingress Protection: IP65
- Cold-roll steel sheets 1.5mm or 316 stainless steel 1.5mm
- Comply with TIA / EIA 568B, Bellcore GR-326, IEC60874-10, Telcordia, JIS, IP65 compliance

Specifications


| Parameter | LGP65(1) 12 Ports | LGP65(2) 24 Ports |
|------------------------------|---|---|
| No. of Cable Entry Ports | 2 | 4 |
| No. of Adaptor Plates (Max.) | 1 | 2 |
| No. of Ports (Max.) | ≤ 12 | ≤ 24 |
| | ≤ (64 LC type) | ≤ (128 LC type) |
| No. of Splice Tray (Max.) | 2 | 2 |
| Material | Cold Rolled Steel:1.5mm / 316 stainless steel 1.5mm | Cold Rolled Steel:1.5mm / 316 stainless steel 1.5mm |
| Color | Beige | Beige |
| Dimension (Height) | 250mm | 250mm |
| (width) | 250mm | 250mm |
| (Depth) | 100mm | 125mm |
| Weight (Net) | 2.8kg | 3.1kg |

Product Gallery

12 Ports




24 Ports

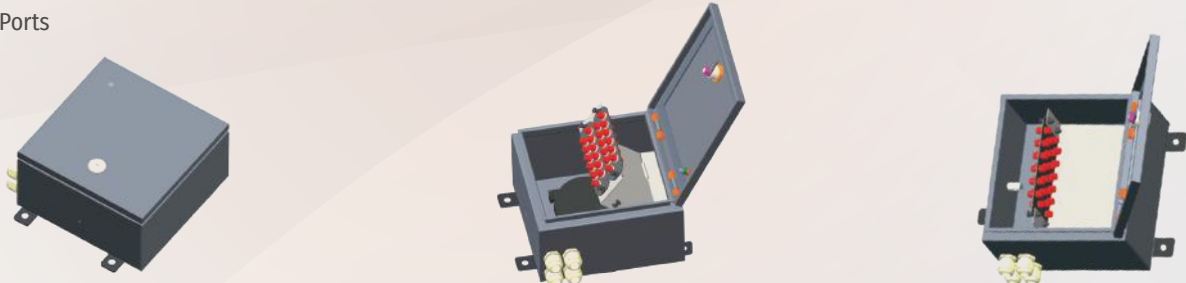


Adaptor Plate

- LC port


LC Duplex (16ports)




LC Quad (24ports)



LC Duplex (24ports)




LC Quad (32ports)




• SC port

SC Duplex (12ports)




SC Simplex (8ports)




• Others port


ST Simplex (12ports)



FC Simplex (12ports)



E2000 (6ports)



Blank Plate




• Examples

LC Duplex (32ports)



LC Duplex (48ports)

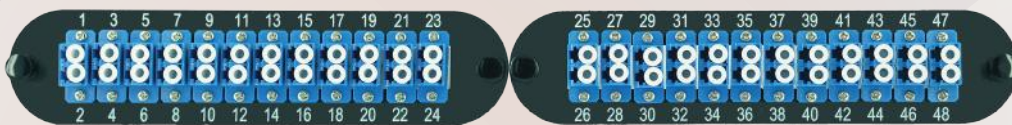

LC Quad (48ports)



LC Quad (64ports)



Ordering Information

| PN | Number of Port | Types of Adapter | Mode Type | Material |
|----------|-----------------|---------------------|--------------------|---------------------------------|
| LGP65(1) | 12 - 12 port | FC - FC adapter | S - Singlemode/UPC | C - cold roll steel 1.5mm |
| LGP65(2) | 24 - 24 port | SC - SC adapter | A - Singlemode/APC | B - BS316 1.5mm stainless steel |
| | 36* - 36 port | ST - ST adapter | M - Mutlimode | |
| | 48* - 48 port | LC - LC adapter | 3 - OM3 Aqua | |
| | 64* - 64 port | MTRJ - MTRJ adapter | 4 - OM4 | |
| | 128* - 128 port | | | |

Ordering Code Example: **L G P 6 5 1 0 4 F C S C**

*Ordering code example

*For LC only