

## LGR Series Wall-mount Fiber Enclosure



24 Ports

### Features


- Two compartments in one box with dual doors, spacious design for splicing, fiber storage and patching
- Compact, Light weight, Ruggedized and Durable Construction
- Modular Splice Tray, 6 adaptors per panel for FC/SC/ST/LC adaptors
- Maximum 24 ports for SC/ST/FC and 48 ports for LC
- Rubber grommets sealed for cable entry holes, two are specially designed for outdoor cable entry
- Routing spools for guiding the excess cable
- Convenient access for installation, maintenance and termination
- Comply with TIA / EIA 568D(2018), Bellcore GR-326, IEC60874-10, Telcordia, JIS compliance

### Specifications


	LGR 1	LGR 2
Parameter	24 Ports	48 Ports
No. of Cable Entry Ports	8	8
No. of Adaptor Plates (Max.)	4	8
No. of Ports (Max.)	≤ 24	≤ 48
	≤ (48 LC Type)	≤ (96 LC Type)
No. of Splice Tray (Max.)	4	8
Material	Cold-roll steel sheets	Cold-roll steel sheets
Color	Beige	Beige
Dimension (Height)	455mm	455mm
(width)	405mm	405mm
(Depth)	80mm	120mm
Weight (Net)	5.5kg	7kg

### Adaptor Plate

FC Simplex Type




SC Simplex Type



ST Simplex Type




LC Duplex Type



### Ordering Information



### Ordering Information

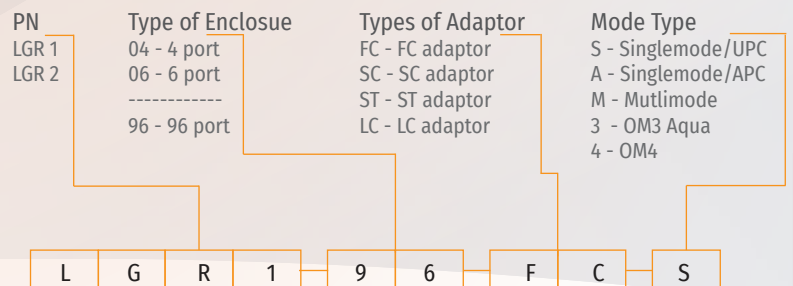

\*ordering information example