

## LRH SWING OUT HINGED TYPE RACK MOUNT ENCLOSURE



### Features

- Swing out hinged type design, easy to access the rear and splice tray
- Front tray lockable
- Adjustable side rack position
- Maximum capacity up to 48 ports for 1U
- Comply with TIA / EIA 568D (2018), Bellcore GR-326, IEC6 0 8 7 4-10, Telcordia, JIS compliance
- Rear and side cable entry feasible
- Full range of adaptor choices


### Specifications

Parameter	1U	2U
No. of Adaptor Plates (Max.)	2	4
No. of Ports (Max.)	≤ 24	≤ 48
	≤ 48(LC port)	≤ 96(LC port)
No. of Splice Tray (Max.)	2	4
Material	Cold Rolled Steel(SPCC)	Cold Rolled Steel(SPCC)
Color	Black	Black
Dimension (Height)	50 mm	90 mm
(Width)	440mm	440 mm
(Depth)	300 mm	300 mm
Weight (Net)	2.7kg	4.1kg


### Adaptor Plate

- LC port

LC Duplex (24ports)




LC Quad (24ports)




- SC port

SC Simplex(12Ports)




SC Duplex (12Ports)



- Others port


ST Simplex (12Ports)



FC Simplex(12Ports)



## Product Diagram

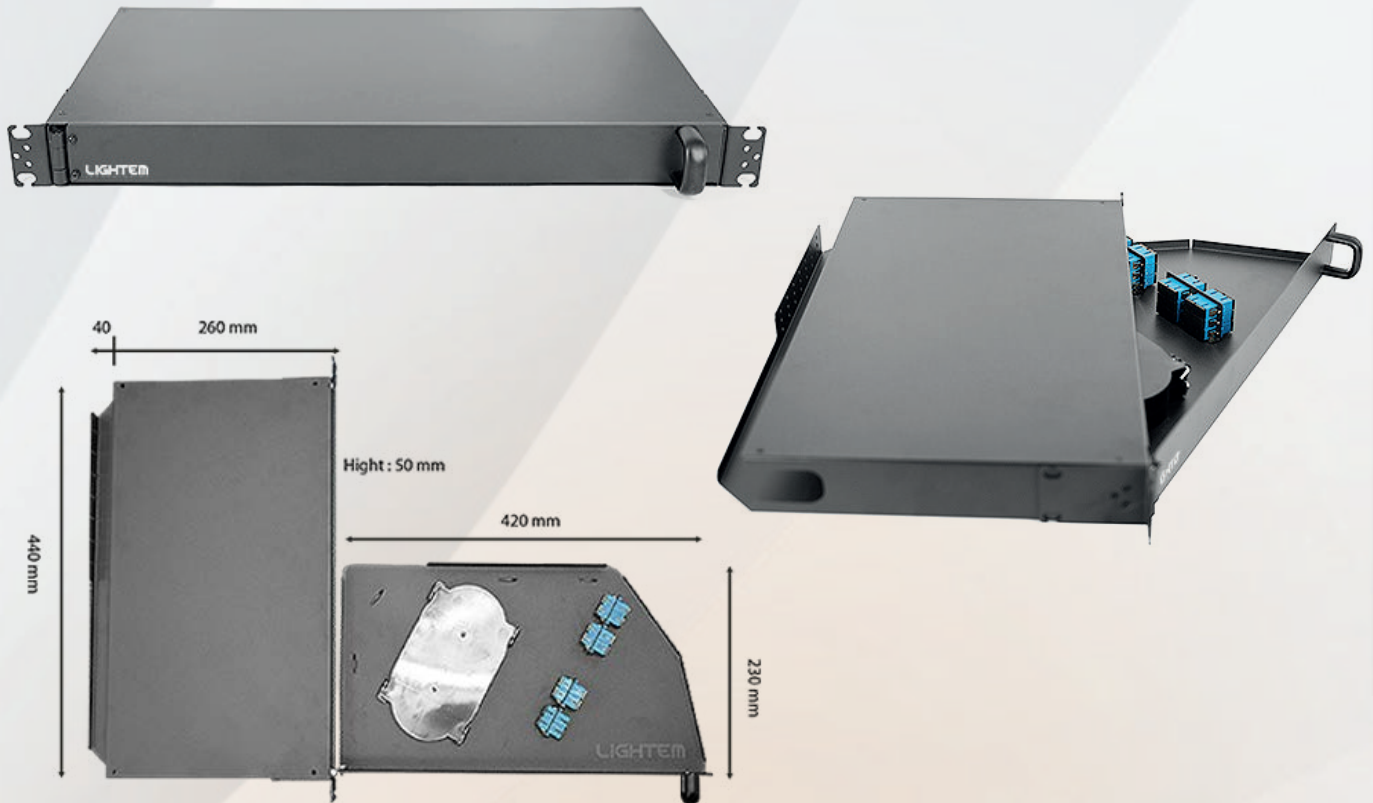

## Ordering Information

PN	Fiber Count	Type of Adaptor	Mode Type
LRH1 - 1U	04 -4 port	FC - FC adaptor	S - Singlemode/UPC
LRH2 - 2U	06 -6 port	SC - SC adaptor	A - Singlemode/APC
	-----	ST - ST adaptor	M - Multimode
	96 -96 port	LC - LC adaptor	3 - OM3 Aqua
			4 - OM4

L R H 2 0 4 F C A

\*ordering code example