



LMGP SERIES MINI WALL-MOUNT FIBER ENCLOSURE


Features

- Two deckers in one box with single doors, lower decker for splicing while the upper flip out type decker for patching
- Very Compact, Light weight, Ruggedized and durable construction
- Rubber sealing at the edge providing excellent dust proof performance
- Maximum 6 ports for SC and 12 ports for LC
- Cable gland and rubber grommets sealed for cable entry holes
- Convenient access for installation, maintenance and termination
- Comply with TIA / EIA 568D(2018), Bellcore GR-326, IEC60874-10, Telcordia, JIS compliance, IP52


Specifications

Parameter	
No. of Cable Entry Ports	4
No. of Ports (Max.)	≤ 6 SC type / ≤ 12 LC type
Material	Cold Rolled steel
Color	Beige
Dimension (Height)	140 mm
(width)	120 mm
(Depth)	50 mm
Weight (Net)	593 g

Product Gallery

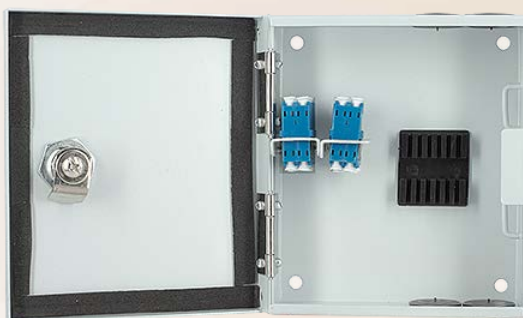

Ordering Information

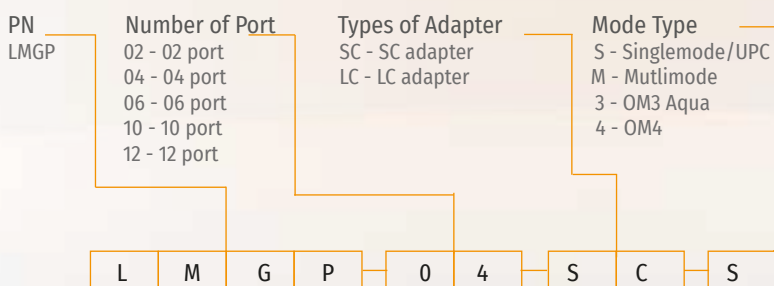

*Ordering code example