


## FIBER OPTIC SPLICE CLOSURE

### Features




- Installation and reentry with a minimum of tools
- Easy to be opened or closed
- Re-enterable and reusable
- All hardware are captived
- Capable for loading 1:8, 1:16 PLC splitter
- Capable for max. 16pcs SC adaptors
- Sheath retention & central strength member fasten system included.
- Ribbed closure construction and lightweight plastic provides strength and resistance to chemical and U.V attack
- Mechanical sealing way, re-enterable and reusable
- RoHS compliance

### Specifications

Material	Polypropylene
Number of inlet/outlet ports	8 Port
Diameter of fiber cable	8 main cable ports: each for 1 cable with max 14mm/ 16 drop cable ports: each for diameter 3mm or 3x2mm drop cables.
Number of outlet drop cable	16 Port
Diameter of drop cable	3 mm
Splicing capacity	48 F
Patching capacity	max 16 pcs SC adapter
Splitter capacity	2 PLC Splitters
Ingress Protection Rating	IP 68
Operating temperature	-40 ~ 65 °C
Size (w x d x h)	387 x 203 x 88 mm
Weight	1.58 Kg

### Product Gallery

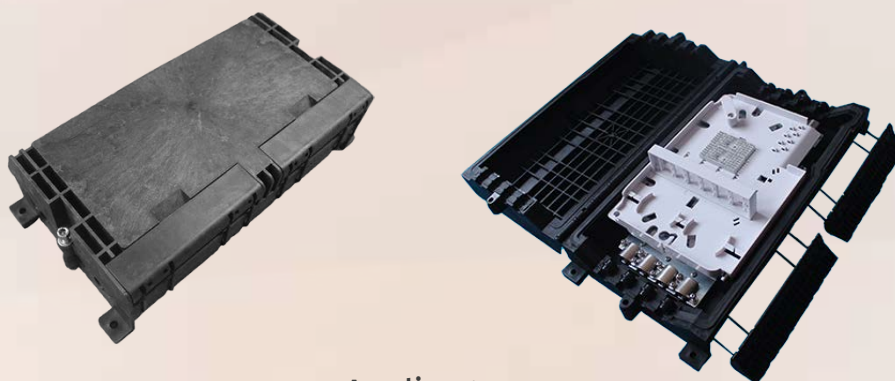


### Accessories

- Aerial mounting kits
- Duct mounting kits
- Pressure valve
- Grounding device

### Application

- Duct Mounting
- Aerial Mounting
- Pole Mounting
- Underground
- Wall Mounting

### Ordering Information

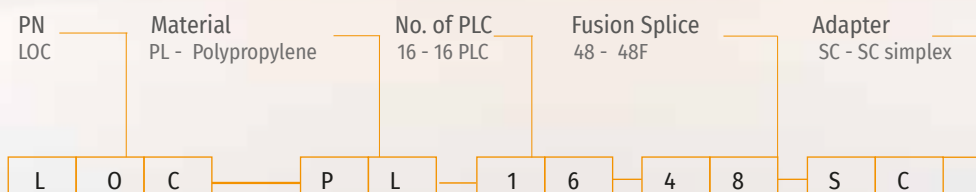

\*ordering code example