

FIBER OPTIC SPLICE CLOSURE

Features




- Max for 36 SC simplex adaptors
- Max for 32 drop cables
- Can hold 1x32, 1x16,1x8 etc PLC splitter
- May be used for cut, uncut and taut sheath applications.
- May be used for all fiber optic cable.
- Sheath retention & central strength member fasten system included.
- Ribbed closure construction and lightweight plastic provides strength and resistance to chemical and U.V attack
- Installation and reentry with a minimum of tools
- Mechanical sealing way,re-enterable and reusable
- All hardware are included
- Closure can be flash tested
- RoHS compliance

Specifications

Splice Tray	max for 24F , max hold 2 trays
Spliced fiber storage capacity	48F fusion splice
PLC splitter	(single fusion) 1x32, 1x 16 PLC, 1x8 splitter
Cable ports	1 oval port+ 4 round ports
Max. diameter of cable(mm)	1 oval port: for 1 loop cable with max dia 17.5mm 4 round ports: each port for 1 cable with max dia 17.5mm or 9 pcs of drop cables with diameter 2x5mm or 9 pcs of cables with diameter 3mm, 2x3.1mm or 4 pcs of cables with diameter 7mm
Adaptor Capacity	36 SC simplex adaptors
Size (HxD)	450mm x 230 mm


Product Gallery

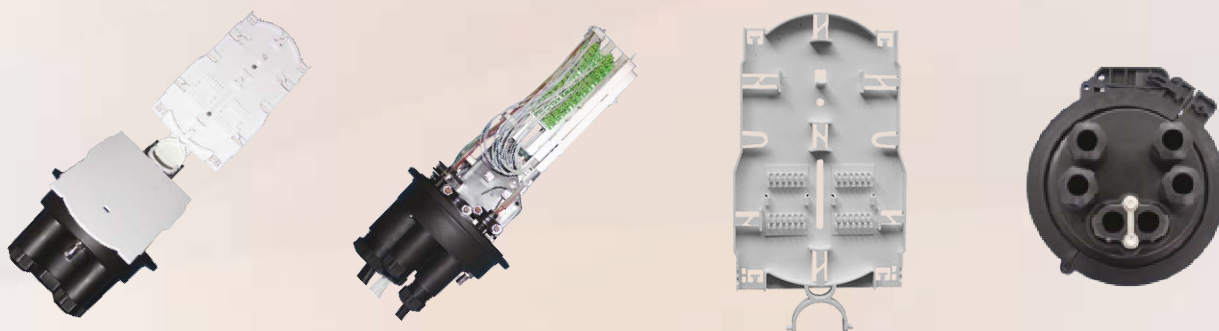

Application

- Watertight
- Underground
- Aerial
- Vault and Wall Mountable

Ordering Information

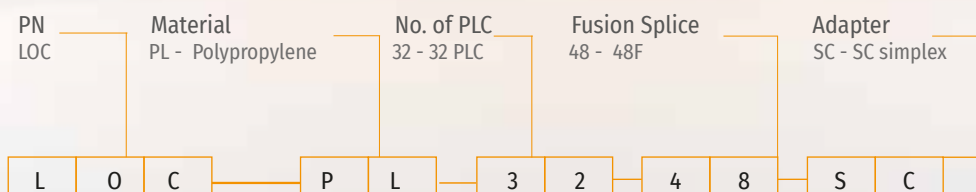

*ordering code example